


ML2SF60MOPR930NB


MUN LIGHT G2 SF Ø600 MO PRISM 9WW NR BK
Description:

LAMP suspended or surface mounted luminaire MUN LIGHT G2 SF Ø600 MO PRISM. Manufactured from recycled aluminium extrusion with a 95% recycling rate, with a PRISMATIC polycarbonate diffuser to control light distribution and reduce glare UGR <19. Model for LED MID-POWER, colour temperature 3000K and CRI90. Electronic ON OFF gear included. IP20, IK07 ratings. Insulation Class I. Photobiological safety group 0. LED life time: 50.000 L80 B10. Available finishes: White and black.

Finish: Texturised matte graphite RAL 7021

Weight: 6.500 g

Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	4.819 lm	°K :	3000
Plum:	39,9W	CRI :	90
Efficacy:	120,8 lm/w	R9 :	51
UGR:	<19	MacAdam:	3
Type:	MID POWER	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	Gear:	Electronic
Power:	35,1W		

Light output tolerance +/- 10%

CUSTOM MADE OPTIONS:

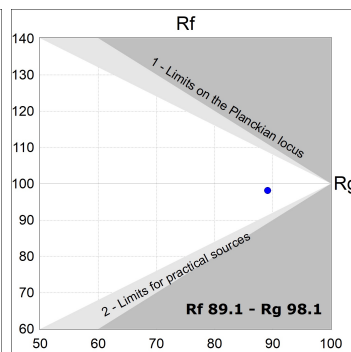
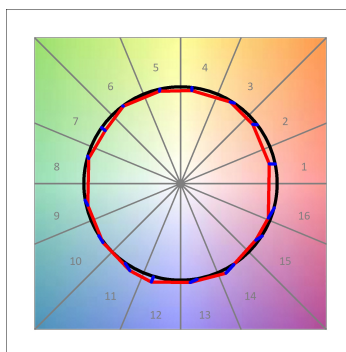
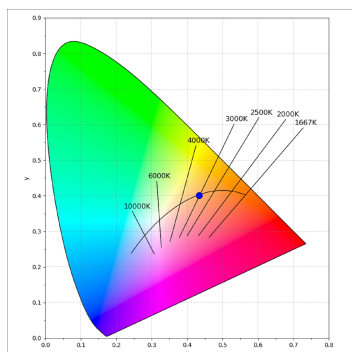
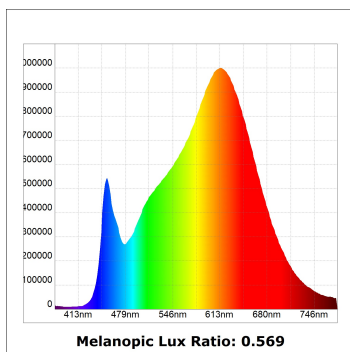
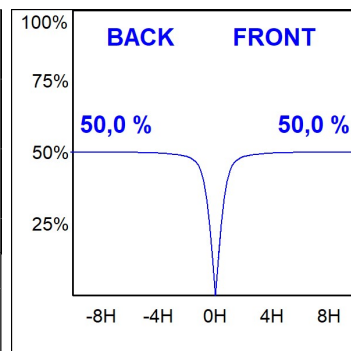
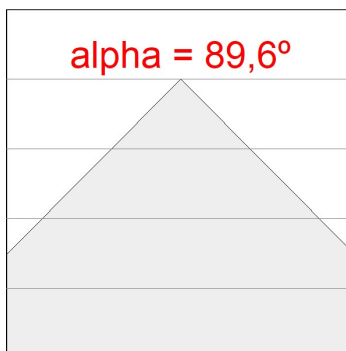
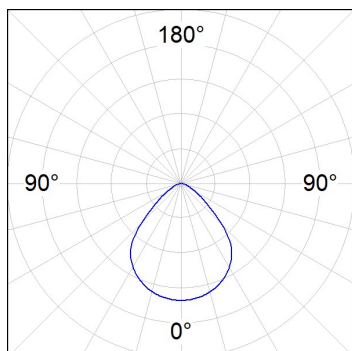

MUN LIGHT

ML2SF60MOPR930NB

MUN LIGHT G2 SF Ø600 MO PRISM 9WW NR BK

PHOTOMETRIC DATA :

ML2SF60MOPR930NB
 $\eta = 100\%$
 $I_{max} = 504 \text{ cd/klm}$
 UTE: 1,00C
 CIE: 65 92 99 100 100



ACCESORIES :

Suspension



Product code:

ML2SUEMSF1500NB

ML2SUEMSF3000NB

Description:

MUN LIGHT G2 ACC SUSP ELMEC 1500MM N B

MUN LIGHT G2 ACC SUSP ELMEC 3000MM N B