


# MUN LIGHT

ML2SF60MOPR930NW



## MUN LIGHT G2 SF Ø600 MO PRISM 9WW NR WH

### Description:

LAMP suspended or surface mounted luminaire MUN LIGHT G2 SF Ø600 MO PRISM. Manufactured from recycled aluminium extrusion with a 95% recycling rate, with a PRISMATIC polycarbonate diffuser to control light distribution and reduce glare UGR <19. Model for LED MID-POWER, colour temperature 3000K and CRI90. Electronic ON OFF gear included. IP20, IK07 ratings. Insulation Class I. Photobiological safety group 0. LED life time: 50.000 L80 B10. Available finishes: White and black.

**Finish:** Texturised matt white


**Weight:** 6.500 g

**Installation:** Surface

### TECHNICAL SPECIFICATIONS:

<b>Light output:</b>	4.819 lm	<b>°K :</b>	3000
<b>Plum:</b>	39,9W	<b>CRI :</b>	90
<b>Efficacy:</b>	120,8 lm/w	<b>R9 :</b>	51
<b>UGR:</b>	<19	<b>MacAdam:</b>	3
<b>Type:</b>	MID POWER	<b>Power Supply:</b>	220-240V 50/60Hz
<b>LED Lifetime:</b>	50.000 L80 B10 (Ta=25°C)	<b>Gear:</b>	Electronic
<b>Power:</b>	35,1W		

*Light output tolerance +/- 10%*

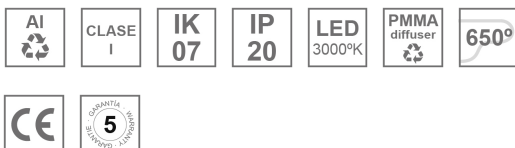

### CUSTOM MADE OPTIONS:










MUN LIGHT

ML2SF60MOPR930NW

MUN LIGHT G2 SF Ø600 MO PRISM 9WW NR WH

PHOTOMETRIC DATA :

ML2SF60MOPR930NW  
 $\eta = 100\%$   
 $I_{max} = 504 \text{ cd/klm}$   
 UTE: 1,00C  
 CIE: 65 92 99 100 100

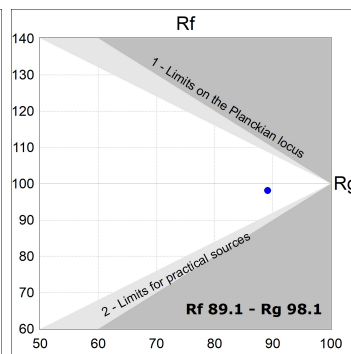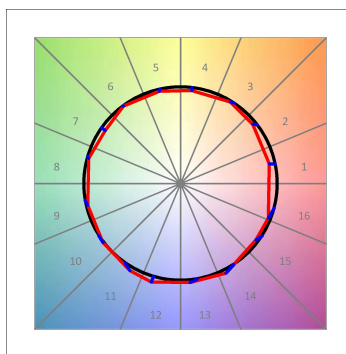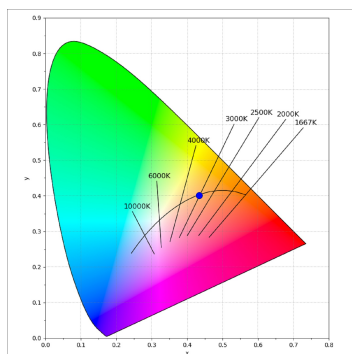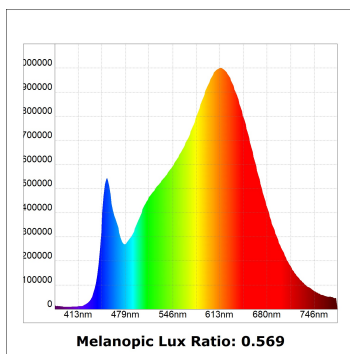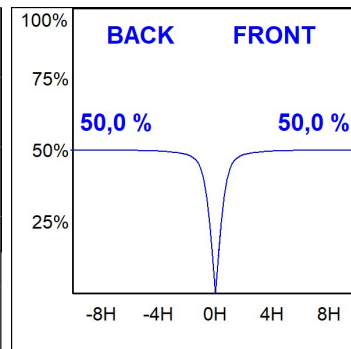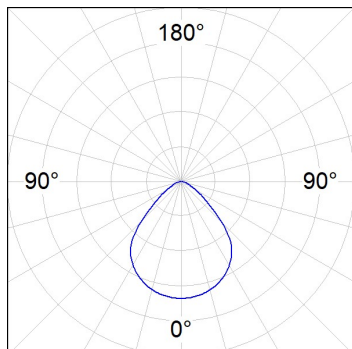

**ACCESORIES :**

**Suspension**



**Product code:**

ML2SUEMSF1500NW

ML2SUEMSF3000NW

**Description:**

MUN LIGHT G2 ACC SUSP ELMEC 1500MM N W

MUN LIGHT G2 ACC SUSP ELMEC 3000MM N W