


QR0D12624MF830N



QUIET RECTANGLE OCULT 2x6 2400 WW MFL

Description:

LAMP Luminaire integrated in a sound-absorbing structure made of rPET recycled material. Model QUIET RECTANGLE OCULT 2x6 .Acoustic material: Panel thickness 12mm (Option 24mm), board composition: rPET 75% recycled. Fire resistance: B-s1, d0. LOW VOC and Low formaldehyde emissions. Luminaire model OD1RE612MF830NBB 3000K and CRI80. Electronic ON OFF gear included. IP43 rate. Insulation Class I. Photobiological safety group 0. LED life time: 50.000 L90 B10. Standard finishes: K05 Charcoal, Z04 Light Camel and Z97 Cactus Green. Further colours available on request.




Installation: Suspended

TECHNICAL SPECIFICATIONS:

Light output:	2.160 lm	°K :	3000
Plum:	28W	CRI :	80
Efficacy:	77,1 lm/w	MacAdam:	3
UGR:	<10	Power Supply:	220-240V 50/60Hz
Type:	HIGH POWER LED	Gear:	Electronic
LED Lifetime:	50.000 L90 B10 (Ta=25°C)		
Power:	12W		

Light output tolerance +/- 10%

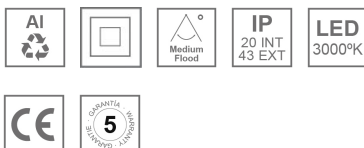

CUSTOM MADE OPTIONS:







QR0D12624MF830N

QUIET RECTANGLE OCULT 2x6 2400 WW MFL

PHOTOMETRIC DATA :


OD1RE612MF830NBB
 $\eta = 100\%$
 $I_{max} = 4606 \text{ cd/klm}$
UTE:
CIE: 102 100 100 100 100

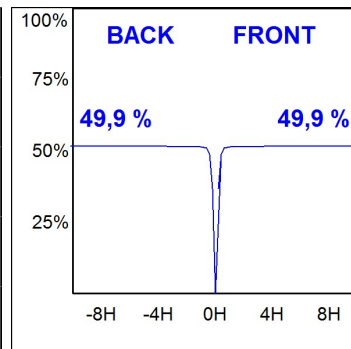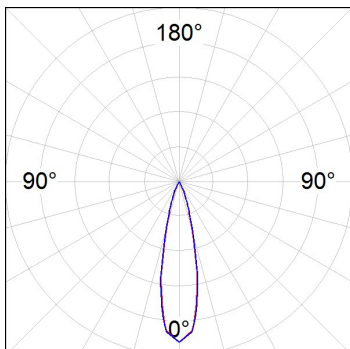

Essential Colours



Trendy Colours

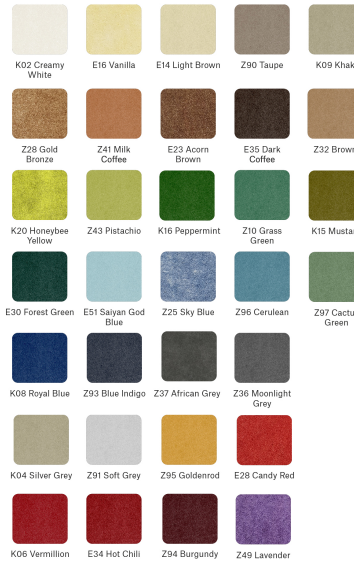

Prime Colours

