


HS2SR30SP940DW



HANCE G2 SEMIREC 3000 9NW SP DALI WH

Description:

LAMP semi-recessed multidirectional spotlight HANCE G2 SEMIREC 3000. Allowing 355° rotation and tilting up to 90°. Body made of die-cast aluminium for proper thermal management. Black polycarbonate injection moulded anti-glare ring. 20° spot reflector. LED COB, 4000K and CRI90. Electronic DALI control gear included.IP20, IK07 ratings. Insulation Class II. LED life time: 72.000 L80B10 (Ta=25°C). Available finishes: Textured white and textured black.



Finish: Texturised white RAL 9010

Installation: Semi-Recessed

TECHNICAL SPECIFICATIONS:

Light output:	2.911 lm	⁰K :	4000
Plum:	28,3W	CRI :	90
Efficacy:	102,9 lm/w	R9 :	64
UGR:	<19	MacAdam:	3
Туре:	СОВ	Power Supply:	220-240V 50/60Hz
LED Lifetime:	72.000 L80B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	25W		

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:







HS2SR30SP940DW

HANCE G2 SEMIREC 3000 9NW SP DALI WH

PHOTOMETRIC DATA :

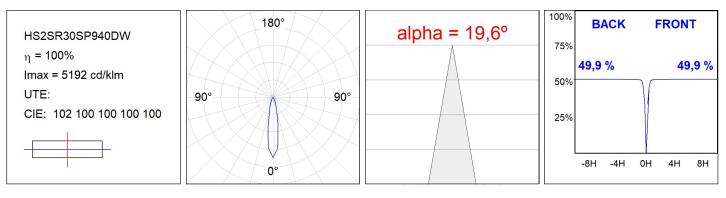

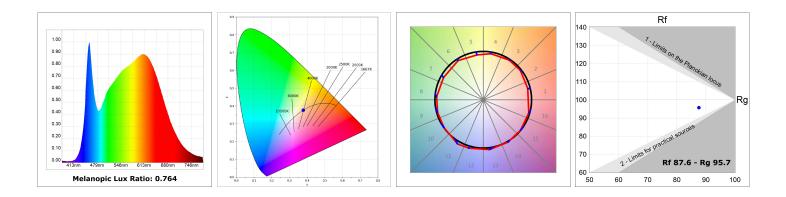



ACCESORIES :

Optical



Product code: HS2HO75

Description: HANCE G2 3000/4000 ACC. HONEYCOMB GRILLE HS2RI90C



Product code:

Description: HANCE G2 3000/4000 ACC. RING DECO CO.



Product code:

HS2RI90M

Description: HANCE G2 3000/4000 ACC. RING DECO MET.



Product code: HS2RI90W

Description: HANCE G2 3000/4000 ACC. RING DECO WH.



Product code: HS2TR75

Description: HANCE G2 3000/4000 ACC. DIF TRANS



Product code: HSSL50

Description: HANCE 1000/2000 ACC. SOFT LENS