


## KOMBIC 100 SURFACE TRACK

K11TK1540WF927NBW




## KOMBIC 100 TK 1500 IP40 9VWW WFL BK/WH

**Description:**

Downlight to adapt to three-phase track model KOMBIC 100 TK by Lamp brand. Body made of white aluminum extrusion with reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Black interior reflector. Heatsink made of die-cast aluminium. COB LED, colour temperature 2700K with CRI90. Luminaire with electronic wiring included. Insolation Class I. Lifetime: 50.000 L80 B10. With IP40 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution and low glare level, less than UGR 17. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

**Finish:** Matte black RAL 9011**Weight:** 502 g**Installation:** 3-Circuit track**TECHNICAL SPECIFICATIONS:**

<b>Light output:</b>	983 lm	<b>°K :</b>	2700
<b>Plum:</b>	13,7W	<b>CRI :</b>	90
<b>Efficacy:</b>	71,7 lm/w	<b>R9 :</b>	60
<b>UGR:</b>	<19	<b>MacAdam:</b>	3
<b>Type:</b>	COB	<b>Power Supply:</b>	220-240V 50/60Hz
<b>LED Lifetime:</b>	50.000 L80 B10 (Ta=25°C)	<b>Gear:</b>	Electronic
<b>Power:</b>	12W		

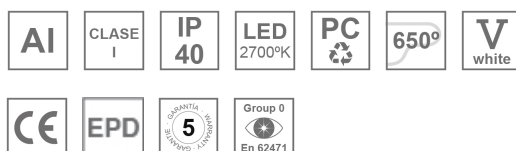**Light output tolerance +/- 10%****CUSTOM MADE OPTIONS:**

KOMBIC 100 SURFACE TRACK

K11TK1540WF927NBW

KOMBIC 100 TK 1500 IP40 9VWW WFL BK/WH

PHOTOMETRIC DATA :

