

K71TS1540WF830DBB



KOMBIC 70 TS 1500 IP40 WW WFL D B/B

Description:

Downlight to attach to three-phase track model KOMBIC 70 TS 1500 from the LAMP brand. Body made of recycled aluminum extrusion with a rate of 75% and R-PC FR WHITE TM recycled polycarbonate reflector with bromine-free flame retardant. Flammability grade V0 according to UL94. Interior reflector finished in black color. Wide flood optics with control of light distribution and lower glare UGR<16. Heatsink made of aluminum injection. COB LED, with 3000K color temperature with CRI80. DALI electronic equipment included. With an IP40 protection degree. Insulation class II. Photobiological safety group 0. LED life time: 72,000 L80 B10. Finished in black and white.

Finish: Matte black RAL 9011


Weight: 620 g

Installation: 3-Circuit track

TECHNICAL SPECIFICATIONS:

Light output:	868 lm	°K :	3000
Plum:	10,5W	CRI :	80
Efficacy:	84,3 lm/w	MacAdam:	3
UGR:	16	Power Supply:	220-240V 50/60Hz
Type:	COB	Gear:	Adjustable DALI
LED Lifetime:	72.000 L80 B10 (Ta=25°C)		
Power:	8,4W		

Light output tolerance +/- 10%

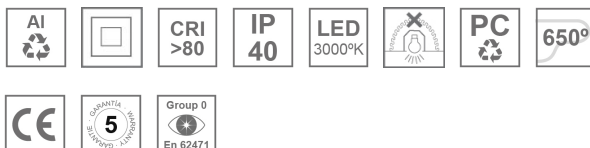

CUSTOM MADE OPTIONS:



K71TS1540WF830DBB

KOMBIC 70 TS 1500 IP40 WW WFL D B/B

PHOTOMETRIC DATA :

K71TS1540WF830DBB
 $\eta = 100\%$
 $I_{max} = 1458 \text{ cd/klm}$
UTE: 1,00A
CIE: 92 97 100 100 100

