

KOMBIC 70 TRACK

K71TS1540WF927NBB




KOMBIC 70 TS 1500 IP40 9VWW WFL B/B

Description:

Downlight to attach to three-phase track model KOMBIC 70 TS 1500 from the LAMP brand. Body made of recycled aluminum extrusion with a rate of 75% and R-PC FR WHITE TM recycled polycarbonate reflector with bromine-free flame retardant. Flammability grade V0 according to UL94. Interior reflector finished in black color. Wide flood optics with control of light distribution and lower glare UGR<16. Heatsink made of aluminum injection. COB LED, with 2700K color temperature with CRI90. ON OFF electronic equipment included. With an IP40 protection degree. Insulation class II. Photobiological safety group 0. LED life time: 72,000 L80 B10. Finished in black and white.

Finish: Matte black RAL 9011

Weight: 580 g




Installation: 3-Circuit track

TECHNICAL SPECIFICATIONS:

Light output:	708 lm	°K :	2700
Plum:	10,5W	CRI :	90
Efficacy:	67,5 lm/w	R9 :	61
UGR:	16	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	72.000 L80 B10 (Ta=25°C)	Gear:	Electronic
Power:	8,4W		

Light output tolerance +/- 10%

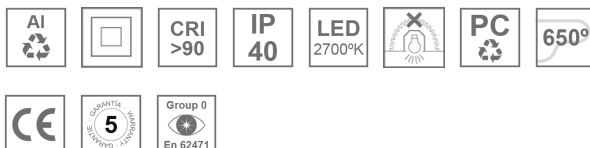

CUSTOM MADE OPTIONS:



KOMBIC 70 TRACK

K71TS1540WF927NBB

KOMBIC 70 TS 1500 IP40 9VWW WFL B/B

PHOTOMETRIC DATA :

K71TS1540WF927NBB
 $\eta = 100\%$
 $I_{max} = 1458 \text{ cd/klm}$
 UTE: 1,00A
 CIE: 92 97 100 100 100

