


PT106040TE40930DW

**PLAT TECH G1 600X600 4000 IP40 930 DALI****Description:**

LAMP recessed PLAT TECH luminaire. Accessories available for other installations. Made of matt white steel with a black polycarbonate tech reflector to control light distribution and reduce glare $UGR < 13$. Model for MID-POWER LED, 3000K colour temperature and CRI 90. DALI control gear included. IP40 rating (non-LAMP recessed part) and IP20 rating (LAMP recessed part), IK07. Insulation class I. Photobiological safety group 0. Lifetime: 72.000h L80 B10. White finished.

Dimensions: 595 x 595 x 13 mm

Installation: Recessed
TECHNICAL SPECIFICATIONS:


Light output:	3.262 lm	°K :	3000
Plum:	30,9W	CRI :	90
Efficacy:	105,6 lm/w	R9 :	67
UGR:	<13	MacAdam:	3
Type:	MID POWER LED	Power Supply:	220-240V 50/60Hz
LED Lifetime:	72.000 L80 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	27W		

Light output tolerance +/- 10%
**CUSTOM MADE OPTIONS:**

PT106040TE40930DW

PLAT TECH G1 600X600 4000 IP40 930 DALI

PHOTOMETRIC DATA :

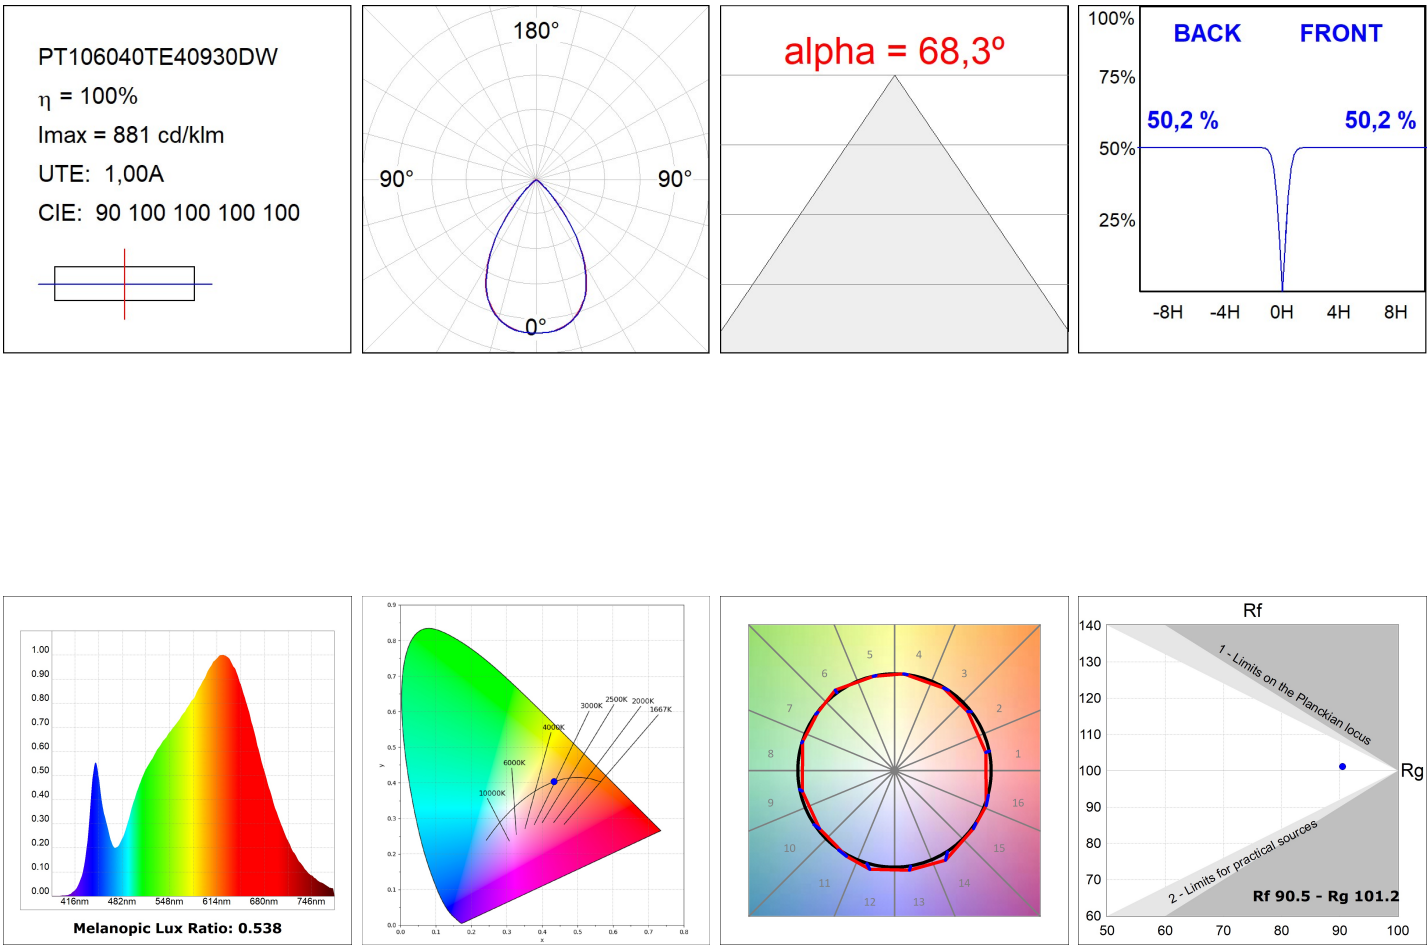

ACCESORIES :

Assembly



Product code:

PLREFR060

Description:

PLAT ACC. FRAME REC 600X600MM WH.



Product code:

PLSFFR060

Description:

PLAT ACC. FRAME SUR 600X600MM WH.

ACCESORIES :

Suspension



Product code:

PLSUW11500

Description:

PLAT G3 ACC. SUSP KIT